



Firefly / Firefly Surface Leistungsleitfaden

Typische Abstandsangaben

Standardoptik Offene Bereiche

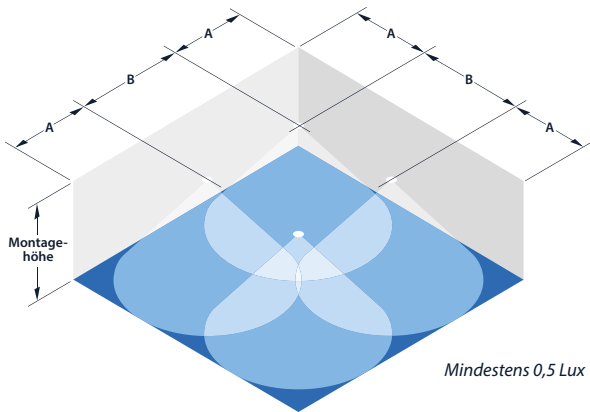


MONTAGE- HÖHE (m)	3 W - 265 lm		2 W - 210 lm	
	A (m)	B (m)	A (m)	B (m)
2,0	3,5	7,3	3,3	7,1
2,5	3,8	8,6	3,7	8,2
3,0	4,3	9,6	4,1	9,3
3,5	4,7	10,6	4,4	10,2
4,0	4,9	11,6	4,6	11,2




Wartungsfaktor 0,90

Standardoptik Korridore

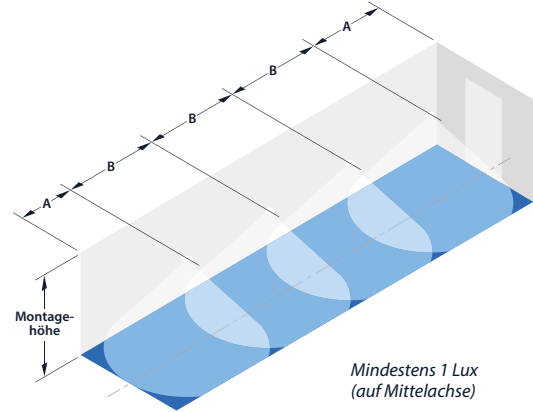


MONTAGE- HÖHE (m)	3 W - 265 lm		2 W - 210 lm	
	A (m)	B (m)	A (m)	B (m)
2,0	3,4	8,2	3,2	7,9
2,5	3,9	9,5	3,4	9,1
3,0	4,2	10,6	3,7	10,0
3,5	4,3	11,5	3,9	10,6
4,0	4,4	12,0	4,0	11,1




Wartungsfaktor 0,90

Flächenoptik Offene Bereiche

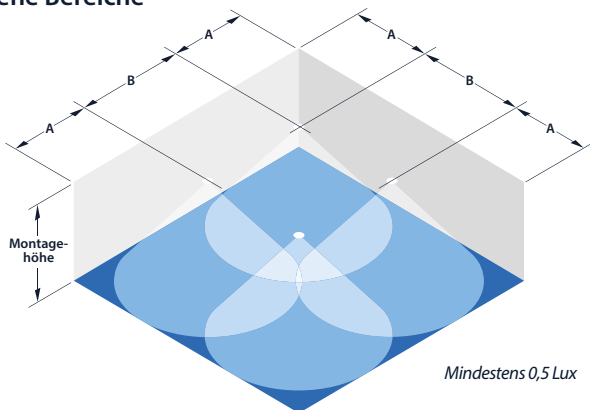


MONTAGE- HÖHE (m)	3 W - 270 lm		2 W - 215 lm	
	A (m)	B (m)	A (m)	B (m)
2,0	4,3	9,6	4,1	9,2
2,5	4,7	11,0	4,5	10,5
3,0	5,3	12,2	5,1	11,7
3,5	5,8	13,5	5,5	12,8
4,0	6,2	14,5	5,7	13,8




Wartungsfaktor 0,90

Korridoroptik Korridore

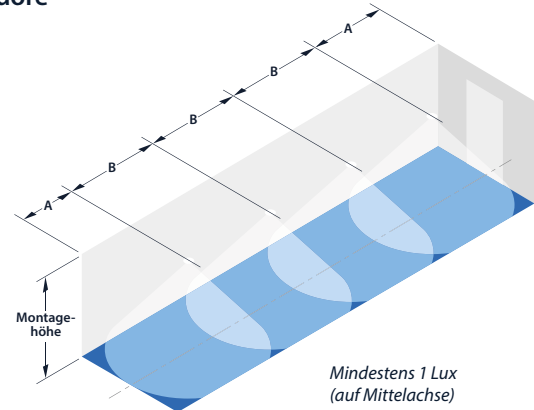

MONTAGE- HÖHE (m)	3 W - 235 lm		2 W - 185 lm	
	A (m)	B (m)	A (m)	B (m)
2,0	8,3	18,7	7,8	17,9
2,5	9,4	21,7	8,8	20,8
3,0	10,3	24,4	9,4	23,5
3,5	10,7	27,0	4,5	22,8
4,0	5,2	25,5	4,9	21,5



Wartungsfaktor 0,90